


# B560K

CONTOUR EDGE BANDING MACHINE

Contour Edge Banding Machine for hot melt glue application to 0.4 – 3.0 mm material.



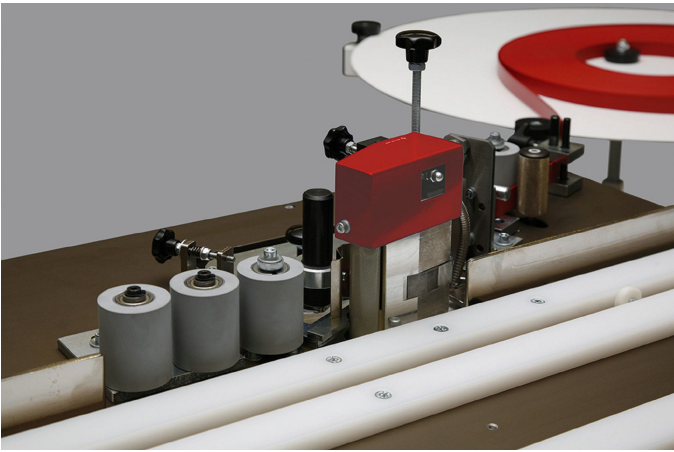

### **BASIC FEATURES**

Direct glue application to edging material: Bottom infeed of glue granules resulting in spill proof glue pot. Quick heating-up time after machine stoppage. Automatic start of application roller after approx. 4-5 min.

Pressure roller driven by gearmotor infinitely adjustable between 0-15 m/min.

Automatic edging feed-in and automatic cut-off operation for straight workpieces via end switch. For curved workpieces via footpedal

Pneumatic cut-off unit capacity max. 3 x 30 mm

**Technical Data**

Workpiece thickness	8 – 50 mm
Workpiece width	min. approx. 30 mm
Workpiece length	min. approx. 200 mm
Edging thickness	0,4 – 3,0 mm
Electrical connection	230V, 50Hz, 1Ph
Total load	3,0 kW
Air connection	6 bar
Weight – nett	approx. 260 Kg
Working height	approx. 875 mm
Internal radius	25 mm (special sizes possible)
Heat output glue pot	2,7 kW
Space required	approx.. 1000 x 700 x 875 mm without turntabl



Lange Maschinenbau GmbH & Co. KG  
Bruchweg 33 . D-32609 Hüllhorst  
Tel: +49 (0) 57 44 - 45 75  
Fax: +49 (0) 57 44 - 32 20  
info@lange-maschinenbau.de  
www.lange-maschinenbau.de

The technical data is a guide line only – our products are being constantly updated and we reserve the right to alter specifications, therefore the illustrations may vary from the actual machines from time to time. We reserve the right to alter the construction of our machines.