

Grainer Clipper

Horizontal, cylindrical surface cleaning machine (clipping of pubescence).

- A special working chamber ensures a high degree of reduction of pubescence.
- The special air system applies cool air in precise amounts, that helps to cool the machine and remove fine pubescence.



Grainer Clipper

Mode of operation

The feeding product contains a mixture of unshelled and shelled oat kernels and loose husks.

A screw conveyor is feeding the product into the working chamber.


The degree of loosing the pubescence is controlled by the counter pressure plate at the groat outlet. This plate is adjustable which influences the degree of cleaning.

- Special steel for feeding screw and ridged cylinder guarantees long lifetime.
- Solidly built screens assure long lifetime.

Technical data

Type	Capacity*	Motor Capacity Main Drive	Aspiration	Net Weight	Gross Weight	
	to/h	kW	m ³ /h	Pa	kg	kg
HFT 1	up to 2.0	up to 7.5	1800	800	~ 330	~ 630
HFT 2	2.0 – 5.0	up to 15	1800	800	~ 450	~ 800

* The capacity depends on the variety of the raw product and the cleaning degree. We reserve the right to deviate from illustrations and data as improvements are constantly being made.

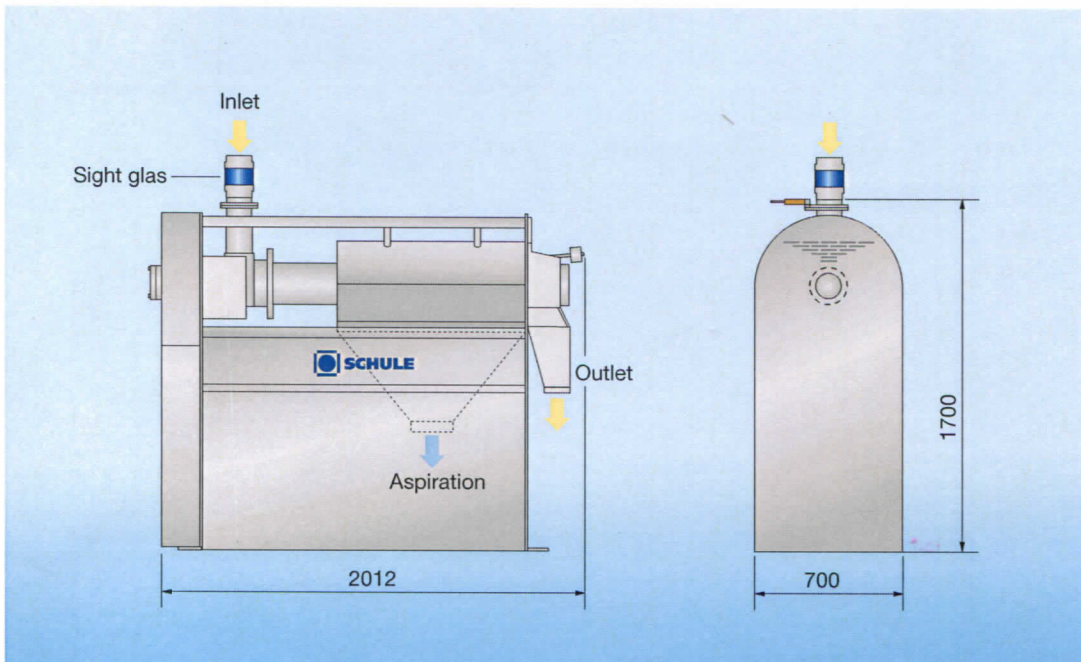

F. H. SCHULE MÜHLENBAU GmbH

Dieselstraße 5-9
D - 21465 Reinbek / Hamburg
Telefon: (040) 7 27 71 - 0
Fax: (040) 7 27 71 - 710

EET EAST EUROPEAN TRADE SRL
547367 Corunca/Targu Mures, Jud. Mures
str. Principala nr.395M E60
Tel: 0265-269150, 268583
Fax: 0265-269150
E-mail: eet@eet.ro; www.eet.ro