




# Rotary Screen Type R and S

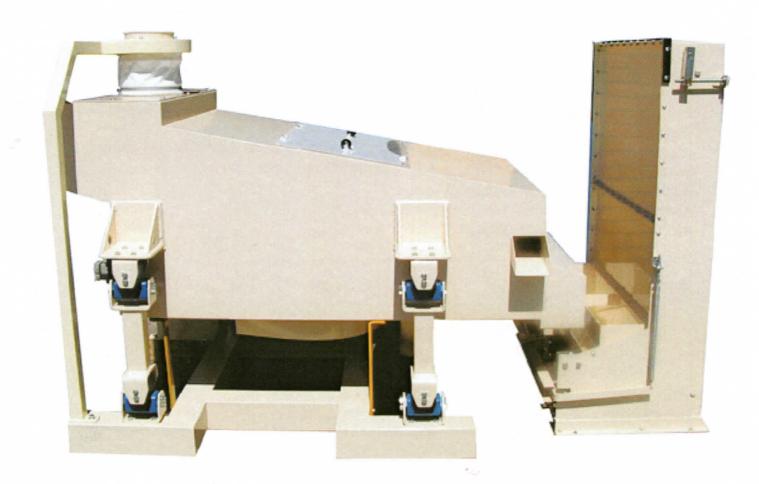

This Rotary Screen is ideally suited to handle all kinds of cereals.

# Rotary Screen Type R and S

## Type "R" can be used as a grain cleaner

Its modern shape and extremely solid construction ensure an extended operation life.

This is of greatest importance in all grain processing plants.

The screens incorporated in the double sieve-system are easily interchangeable in accordance with the product requirements.

Meanwhile the big impurities stays on top of the upper screen, the main stream passes. The upper layer reach the air channel, where the specific light particles are aspirated. The small impurities passes the lower layer and are bagged off together with the big impurities at a bagging bench. An integrated air-channel ensures efficient aspiration of the passing product.

Rubber balls keep the screen perforations perfectly clear and contribute towards maintaining the nominal capacity of the cleaner.

The screen mash is determined on the basis of the requests.

#### Type "S" can be used as a length-grader

The product can be classified in 3 fractions.

Sieve frames covered with suitable selected screens are easily exchangeable.

The capacity depends essentially on the kind of initial product and the desired end product (s).

Precise data are determined in each particular case.

## **Rotary Screen**

Туре	Airconsumption m³/h	Screens m <sup>2</sup>	Drive kW	Weight kg	Vol.
KRS R/S1	1.800	1.8	1.5 / 0,095	750	3.9
KRS R/S2	3.060	3.0	1.5 / 0,095	1.000	5.3
KRS R/S3	4.920	4.5	1.5 / 0,095	1.250	7.1

#### Capacity

Туре	Grain	Paddy
KRS R/S1	5.00	3.50
KRS R/S2	8.00	6.00
KRS R/S3	12.50	9.00

EET EAST EUROPEAN TRADE SRL

547367 Corunca/Targu Mures, Jud. Mures

str. Principala nr.395M E60 Tel: 0265-269150, 268583

Fax: 0265-269150

E-mail: eet@eet.ro; www.eet.ro



F. H. SCHULE Mühlenbau GmbH Dieselstraße 5-9

D - 21465 Reinbek / Hamburg Phone +49 (0) 40 7 27 71 - 700 Fax +49 (0) 40 7 27 71 - 710 schule@amandus-kahl-group.de

