


# B500K

CONTOUR EDGE BANDING MACHINE

Contour Edge Banding Machine for hot melt glue application to 0.4 – 3.0 mm material.



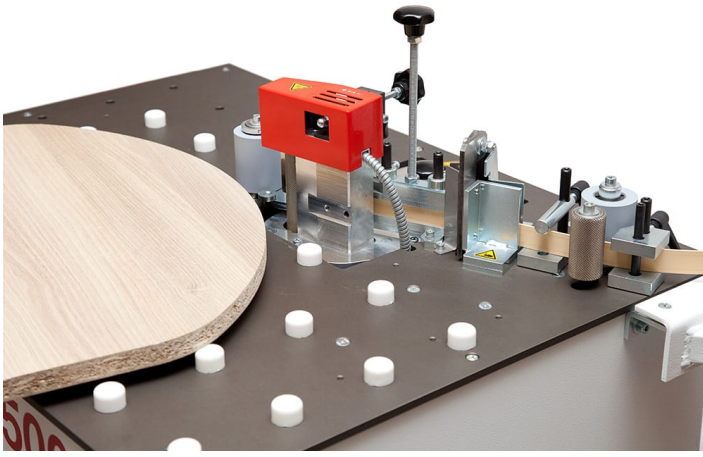

#### **BASIC FEATURES**

**Direct glue application to edging material: Bottom infeed of glue granules resulting in spill proof glue pot. Quick heating-up time after machine stoppage. Automatic start of application roller after approx. 8-10 min.**

**Pressure roller driven by gearmotor infinitely adjustable between 0-15 m/min.**

**Automatic edging feed-in and automatic cut-off operation for straight and curved workpieces via footpedal**

**Pneumatic cutt-off unit capacity max. 3 x 30 mm**

**Turntable D = 600mm**

**Technical Data**

|                       |   |
|-----------------------|---|
| Workpiece thickness   | 8 – 50 mm                                     |
| Workpiece width       | min. approx. 30 mm                            |
| Workpiece length      | min. approx. 200 mm                           |
| Edging thickness      | 0,4 – 3,0 mm                                  |
| Electrical connection | 230V, 50Hz, 1Ph                               |
| Total load            | 3,0 kW  |
| Air connection        | 6 bar   |
| Weight – nett         | approx. 165 Kg                                |
| Working height        | approx. 885 mm                                |
| Internal radius       | 25 mm (special sizes possible)                |
| Heat output glue pot  | 2,7 kW  |
| Space required        | approx.. 810 x 610 x 885 mm without turntable |



Lange Maschinenbau GmbH & Co. KG  
Bruchweg 33 . D-32609 Hüllhorst  
Tel: +49 (0) 57 44 - 45 75  
Fax: +49 (0) 57 44 - 32 20  
info@lange-maschinenbau.de  
www.lange-maschinenbau.de

The technical data is a guide line only – our products are being constantly updated and we reserve the right to alter specifications, therefore the illustrations may vary from the actual machines from time to time. We reserve the right to alter the construction of our machines.